




## Static Grounding Reels

### Model: S-RL

The ATEX approved “Static Grounding Reels” have a self-retracting cable drum and an instant locking mechanism to prevent the cable from becoming tangled.

The Standard S-RL model includes a 7m (23ft.) polyurethane jacketed stainless steel cable. An ATEX approved, heavy duty grounding clamp (with replaceable stainless steel tips) is connected to the cable for a solid connection to the grounding surface. S-RL Reels are also available with 15m (49ft.) and 20m (65ft.) cable lengths.

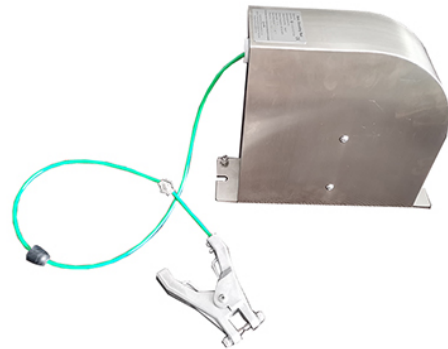

CE II 2G Ex h IIC T6 Gb

### ► Features & Benefits

- Stainless steel housing and base plate.
- The sealed housing prevents the cable from being exposed to corrosive and harsh environments.
- The self-storing cable design prevents personnel from being exposed to trip hazards. The self-retracting cable mechanism keeps the cable stored in a safe, organized manner.
- An instant locking mechanism holds the cable at the desired extended length.
- Applicable Directive: 2014/34/EU

## Static Grounding Reel with Alarm *Battery Operated*

### Model: SA-YL

The model SA-YL includes all of the features included in our S-RL models with the following **special features**:

Alarm	Audible alarm
Alarm Volume	>90dB (Alarm sounder 90dB at 30cm)
Monitoring Set Point	60 ohms
Battery	Lithium battery (3.6V)
Clamp Cable Length	7m (23ft.)
Certification	ExialICT4 Ga

